



C9 Hydrocarbon Resins for Adhesive Industry

Typical Properties

Item	Specification	Test Method
Softening Point (R&B) °C	90-105, 105-115, 115-125, 125-135	ASTM E28-58
Color, Gardner (max)	4-7	ASTM D1544
Specific Gravity (20/20°C)	1.05-1.10	ASTM D71-72A
Acid Value (KOH mg/g)	0.1 max	ASTM D-974
Bromine Value (Br cg/g)	25 max	ASTM D1159
Ash Content (wt %)	0.05 max	ASTM 2451
Molecular Weight (Mw)	1050-1300, 1300-1500, 1450-1800, 1800-2600	GPC

1. Grades Suggestion



UCL-100, UCL-110, UCL-120, UCL-130 (As to details please feel free to ask TDS)

2. Characteristics

UCL Series hydrocarbon resins are catalytic based solid yellowish granule form. It have good compatible with a large variety of polymeric materials, such as: EVA, SBS, BR, CR, PP, PE, etc.

3. Chemical Structure & Composition

UCL & UCLS series is simplified chemical reaction between styrene, indene and their methyl derivates. The main structure and IR as following:

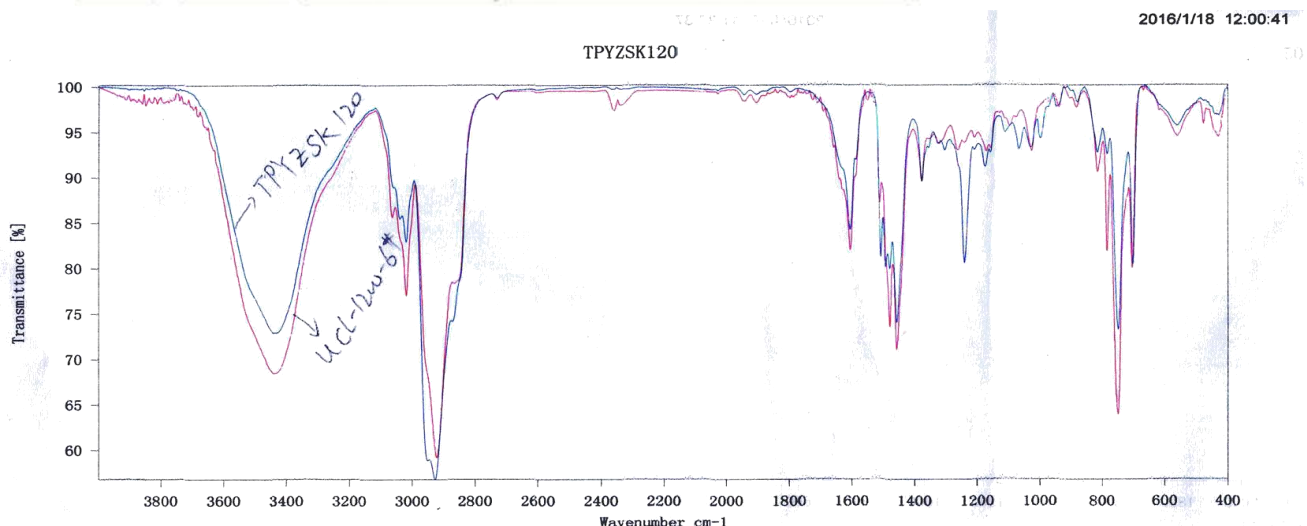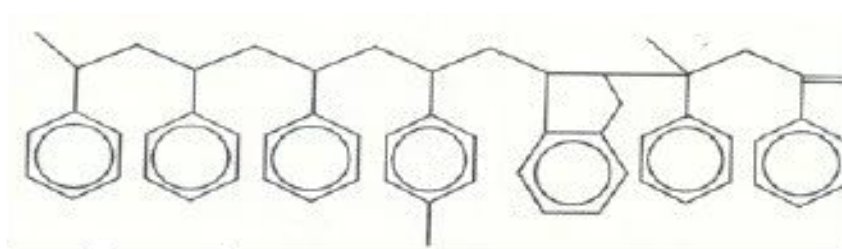



PUYANG UNITED CHEMICAL CO., LTD.

RM 1008, CYBER BUSINESS BUILDING, ZHENXING
ROAD, PUYANG, HENAN, CHINA

TEL: 0086-393-4662488

www.united-chem.cn

4. Formula Recommendation for Reference

Item	EVA (28% VA content Melt Index: 400g/min)	Petroleum Resin	Wax	Others
Ratio (%)	40	35	15	10

5. Technical Advantages

Used in adhesive industry, UCL series resins provide several technical advantages, such as:

- ★ Greatly Increase cohesion
- ★ Increase tack and adhesion
- ★ Lower viscosity to get better wettability
- ★ Adjustment of open time

6. Application

- ★ Contact adhesives
- ★ Hot melt adhesive (EVA)
- ★ Case/carton adhesives
- ★ Edge banding/ Woodworking

7. Packaging and Storage

C9 resins are available both in 25Kg multi-ply paper bags and 500kg bags.

All resins with a low softening point present a risk of solidifying, which increases in hot weather. Therefore for softening points of less or equal to 100° C, we recommend :

- ★ Avoid storage for prolonged period ;
- ★ Storage in a cool (25° C max), ventilated area, out of sunlight .

The information in this bulletin is believed to be accurate, but all recommendations are made without warranty since the conditions of use are beyond United Chemical Company's control. The listed properties are illustrative only, and not product specifications. United Chemical disclaims any liability in connection with the use of the information, and does not warrant against infringement by reason of the use of its products in combination with other material or in any process.

Print Date: Jan., 2019